

# SmartLegs™

By LifeDesk.

## SmartLegs 2-ER (formerly LD2-98)

(Silver/Black/White)

23.5" feet for 24" Tops

27.5" feet for 30" Tops

### KEY FEATURES


**Height range:** 22" to 47" plus top

**Weight Capacity:** 350 pounds

**Travel Speed:** 1.5" per second

**Max Top Size:** 108"

**Minimum top size:** 24"x24" with purchase of short brackets.

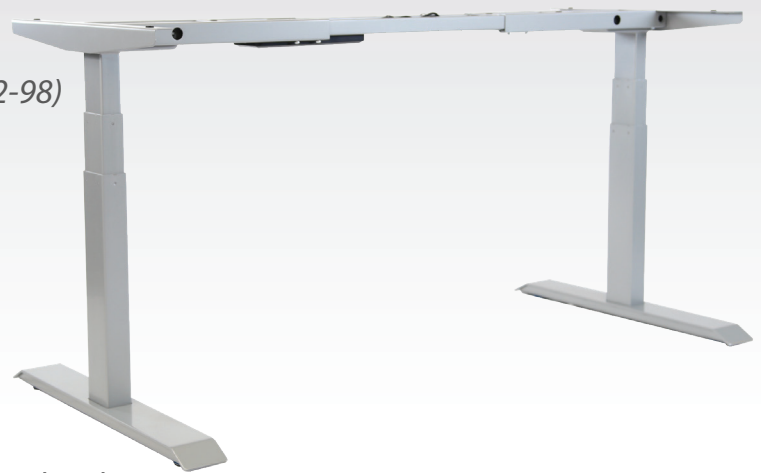

SPECIFICATIONS	
Height Range	22" to 47" (plus top), with optional height extender 25" to 50" (plus top)
Weight Capacity	350 pounds
Travel Speed	1.5" per Second
Maximum Top Width Size	24" (with Short Brackets) up to 108"   Supports Extended Corner designs up to 36" *Worksurfaces >72" we recommend an additional support bar
Foot	23.5" or 27.5" weighted for maximum stability
Color	Black RAL9005, Silver RAL 9006 or White RAL 9016
Standard	CE
ISO 9001 Certified	Quality
ISO 14001 Certified	Environment
Manufacturing Practices	Toyota Production System and 5S
Noise Rating	<50 db
Overload Protection	Integrated in appropriate Control-Box
Duty Cycle	10%, max, 2min. continuous use
Tube Material	Steel
Operating Temperature	+5°C to +40°C
CONTROL BOX SPECIFICATIONS	
Digital Read-Out	Yes; Standard. Other manufacturers charge an additional cost. We do not.
Memory Settings	Four programmable memory settings; Standard.
Number of Actuator Outputs	2
Output Voltage (VDC)	33
Input Voltage (VAC)	110/230
Transformer Power (watts)	400W
Actuator Plugs	Straight cable
Hand Control Plugs	RJ straight cable
Power Draw	0.1W in stand-by (Up to 2.5 amp draw depending on load)
Power Plug	Can be specified per country's needs
Color	Black
Duty Cycle	10% max, 2 min. continuous use
Overload Protection	For all channels, single-extra protected
Ambient Temperature	+5°C to +40°C
Standard	UL60601-1 / CE
Anti-Collision Sensitivity	Yes